
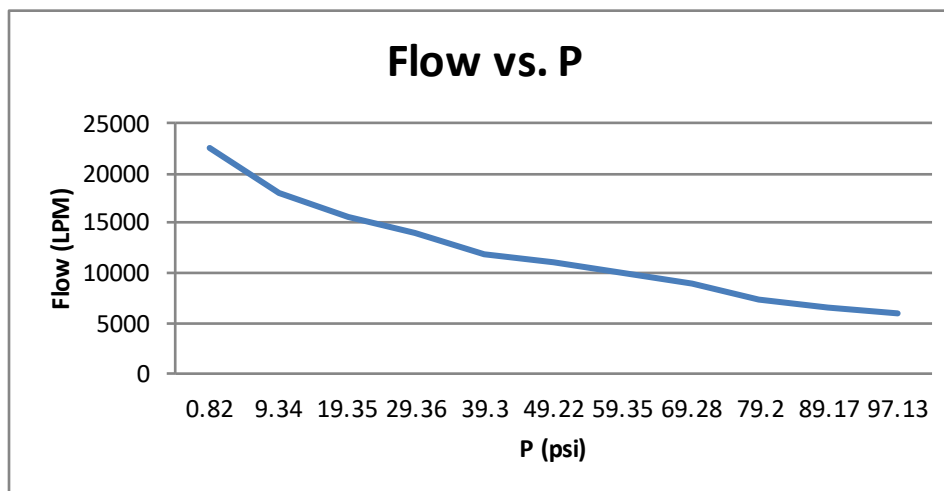




T(°F)	T(°C)	P (psi)	Flow (LPM)	Flow (CCM)
86.35	30.19444	0.82	22.5	22500
87.81	31.00556	9.34	18	18000
89.89	32.16111	19.35	15.5	15500
91.74	33.18889	29.36	14	14000
93.9	34.38889	39.3	12	12000
96.67	35.92778	49.22	11	11000
99.86	37.7	59.35	10	10000
103.35	39.63889	69.28	9	9000
107.56	41.97778	79.2	7.5	7500
112.9	44.94444	89.17	6.5	6500
119.37	48.53889	97.13	6	6000
142.48	61.37778	97.11	5.5	5500
157.44	69.68889	98.91	5	5000
176.83	80.46111	97.7	5	5000
193.77	89.87222	95.78	4.35	4350
211.89	99.93889	96.07	3.8	3800
230.93	110.5167	96.59	3.1	3100
247.59	119.7722	96.53	2.45	2450
264.32	129.0667	97.1	1.6	1600
282.83	139.35	97.41	1	1000
302.32	150.1778	97.15	0.85	850
318.03	158.9056	98.66	0.65	650
338.43	170.2389	97.62	0.4	400

97.21231

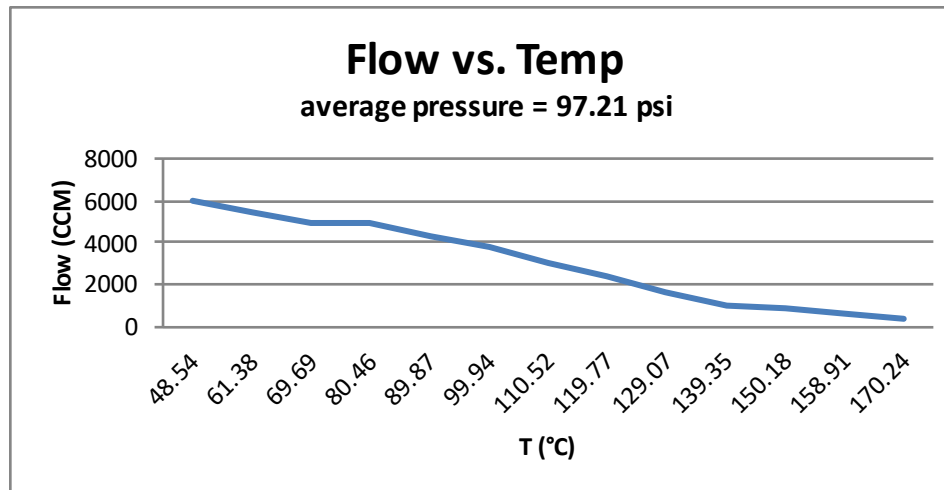



T(°F)	T(°C)	P (psi)	Flow (LPM)	Flow (CCM)
74.63	23.68	0.89	>30	>30000
77.14	25.08	9.39	>30	>30000
79.02	26.12	19.24	25	25000
81.43	27.46	29.28	22	22000
84.05	28.92	39.35	18.5	18500
87.29	30.72	49.32	16	16000
90.61	32.56	59.25	14	14000
94.31	34.62	69.27	12.5	12500
98.62	37.01	79.15	11	11000
104.7	40.39	89.13	9.5	9500
111.67	44.26	97.15	8	8000
138.84	59.36	97.15	7.5	7500
158.65	70.36	97.16	6.5	6500
177.34	80.74	97.15	5	5000
196.26	91.26	97.19	4.8	4800
214.59	101.44	97.21	4.4	4400
232.12	111.18	97.15	3.6	3600
247.78	119.88	97.11	2.8	2800
268.16	131.20	97.16	2.25	2250
284.11	140.06	97.13	1.65	1650
303.39	150.77	97.11	1.3	1300
318.13	158.96	98.57	0.9	900
337.65	169.81	97.8	0.75	750
356.38	180.21	97.16	0.55	550
373.28	189.60	98.73	0.4	400

97.39533

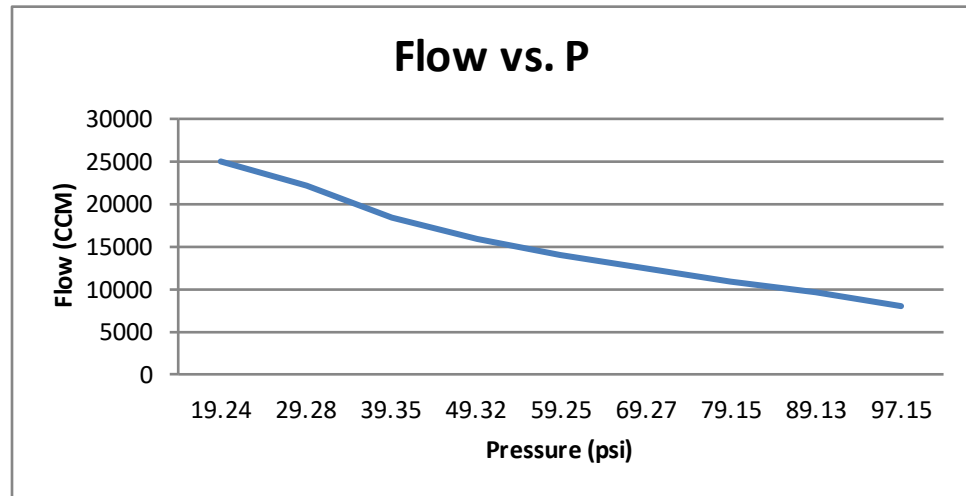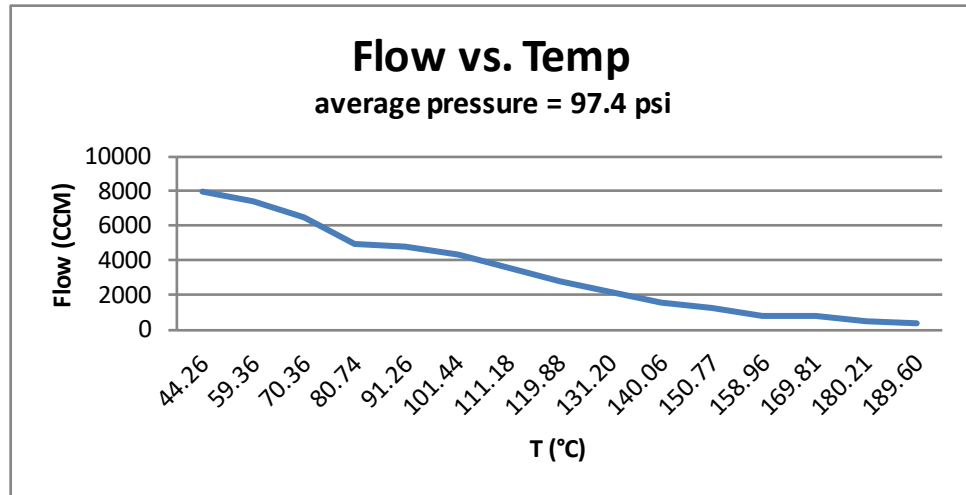



T (°F)	T (°C)	P (psi)	Flow (LPM)	Flow (CCM)
63.43	17.46111	0.81	>30	>30000
69.82	21.01111	9.35	26	26000
73.06	22.81111	19.22	21.5	21500
75.05	23.91667	29.37	18	18000
77.25	25.13889	39.27	15	15000
79.76	26.53333	49.21	13	13000
83.11	28.39444	59.29	11	11000
86.87	30.48333	69.3	9	9000
90.82	32.67778	79.28	8	8000
95.85	35.47222	89.11	7	7000
103.45	39.69444	97.18	6	6000
126.36	52.42222	97.16	5	5000
142.68	61.48889	97.12	5	5000
160.67	71.48333	97.11	4.4	4400
180.92	82.73333	97.1	3.9	3900
197.86	92.14444	97.18	3.3	3300
215.99	102.2167	97.1	2.75	2750
232.22	111.2333	97.11	2.3	2300
248.87	120.4833	97.04	1.65	1650
269.54	131.9667	97.15	1.2	1200
284.01	140.0056	98.76	0.85	850
304.56	151.4222	97.76	0.7	700
321.45	160.8056	97.19	0.5	500
338.72	170.4	97.19	0.35	350

97.29643

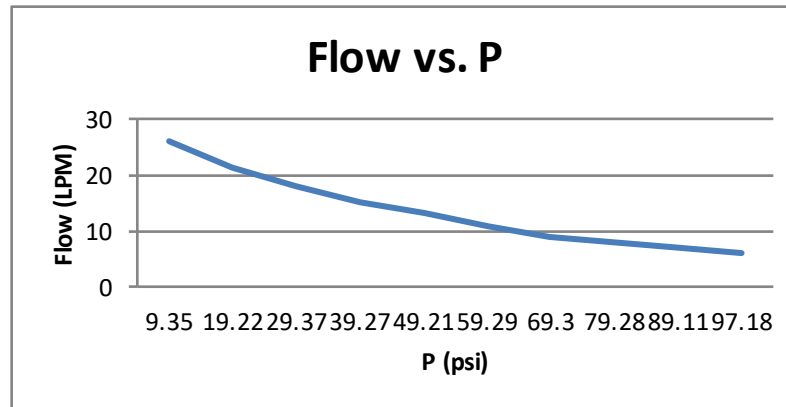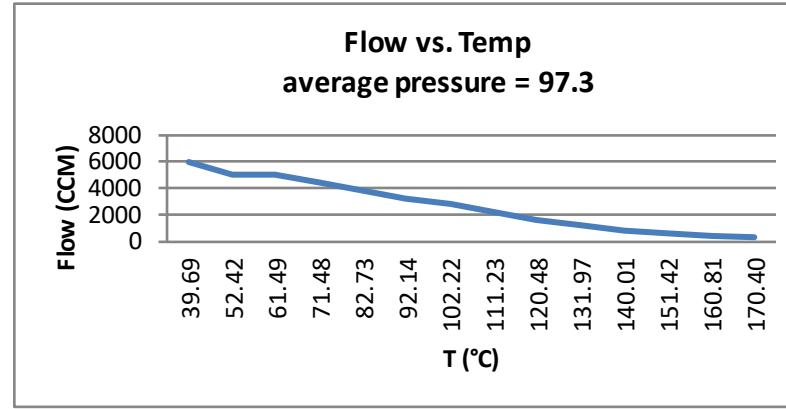



T (°F)	T (°C)	P (psi)	Flow (LPM)	Flow (CCM)
66.26	19.03333	0.81	>30	>30000
79.39	26.32778	9.42	25	25000
90.51	32.50556	19.23	20	20000
91.84	33.24444	29.24	16.5	16500
92.67	33.70556	39.22	14.5	14500
93.69	34.27222	49.25	12	12000
96.06	35.58889	59.38	10	10000
99.03	37.23889	69.09	9	9000
102.32	39.06667	79.31	8	8000
106.74	41.52222	89.12	7	7000
112.49	44.71667	97.21	6	6000
135.11	57.28333	97.15	5	5000
149.15	65.08333	97.15	4.8	4800
169.26	76.25556	97.23	4.5	4500
189.49	87.49444	97.18	4.15	4150
205.73	96.51667	97.15	3.5	3500
220.47	104.7056	97.2	2.8	2800
242.57	116.9833	97.14	2.5	2500
257.83	125.4611	98.83	1.8	1800
276.53	135.85	98.09	1.5	1500
292.48	144.7111	97.23	1.2	1200
311.69	155.3833	97.11	0.9	900
330.15	165.6389	97.14	0.7	700
348.48	175.8222	97.23	0.5	500
366.66	185.9222	97.15	0.35	350

97.346

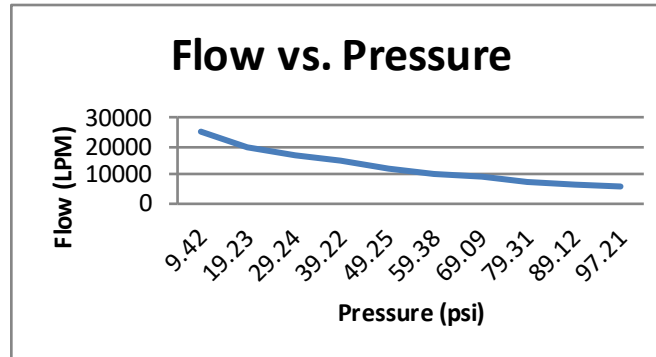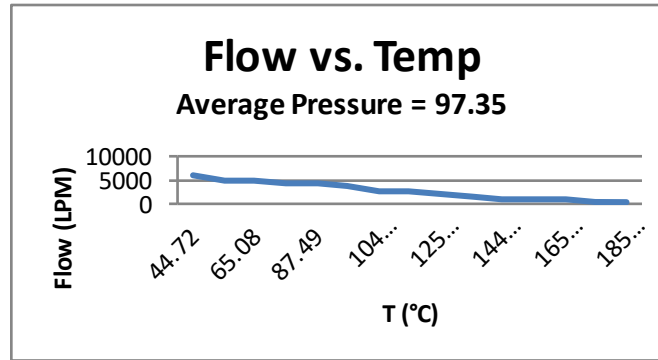


Warm Form 6810				
T (°F)	T (°C)	P (psi)	Flow (LPM)	Flow (CCM)
74.63	23.68333	0.89	>30	>30000
77.14	25.07778	9.39	>30	>30000
79.02	26.12222	19.24	25	25000
81.43	27.46111	29.28	22	22000
84.05	28.91667	39.35	18.5	18500
87.29	30.71667	49.32	16	16000
90.61	32.56111	59.25	14	14000
94.31	34.61667	69.27	12.5	12500
98.62	37.01111	79.15	11	11000
104.7	40.38889	89.13	9.5	9500
111.67	44.26111	97.15	8	8000
138.84	59.35556	97.15	7.5	7500
158.65	70.36111	97.16	6.5	6500
177.34	80.74444	97.15	5	5000
196.26	91.25556	97.19	4.8	4800
214.59	101.4389	97.21	4.4	4400
232.12	111.1778	97.15	3.6	3600
247.78	119.8778	97.11	2.8	2800
268.16	131.2	97.16	2.25	2250
284.11	140.0611	97.13	1.65	1650
303.39	150.7722	97.11	1.3	1300
318.13	158.9611	98.57	0.9	900
337.65	169.8056	97.8	0.75	750
356.38	180.2111	97.16	0.55	550
373.28	189.6	98.73	0.4	400

Air Tech				
T (°F)	T (°C)	P (psi)	Flow (LPM)	Flow (CCM)
66.26	19.03333	0.81	>30	>30000
79.39	26.32778	9.42	25	25000
90.51	32.50556	19.23	20	20000
91.84	33.24444	29.24	16.5	16500
92.67	33.70556	39.22	14.5	14500
93.69	34.27222	49.25	12	12000
96.06	35.58889	59.38	10	10000
99.03	37.23889	69.09	9	9000
102.32	39.06667	79.31	8	8000
106.74	41.52222	89.12	7	7000
112.49	44.71667	97.21	6	6000
135.11	57.28333	97.15	5	5000
149.15	65.08333	97.15	4.8	4800
169.26	76.25556	97.23	4.5	4500
189.49	87.49444	97.18	4.15	4150
205.73	96.51667	97.15	3.5	3500
220.47	104.7056	97.2	2.8	2800
242.57	116.9833	97.14	2.5	2500
257.83	125.4611	98.83	1.8	1800
276.53	135.85	98.09	1.5	1500
292.48	144.7111	97.23	1.2	1200
311.69	155.3833	97.11	0.9	900
330.15	165.6389	97.14	0.7	700
348.48	175.8222	97.23	0.5	500
366.66	185.9222	97.15	0.35	350

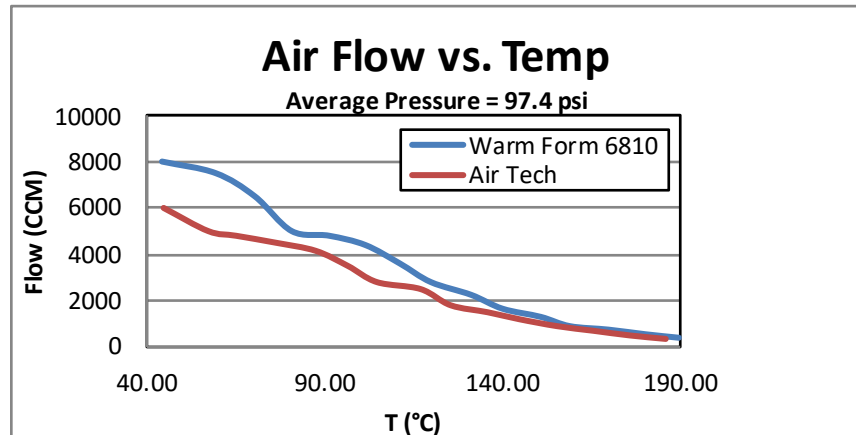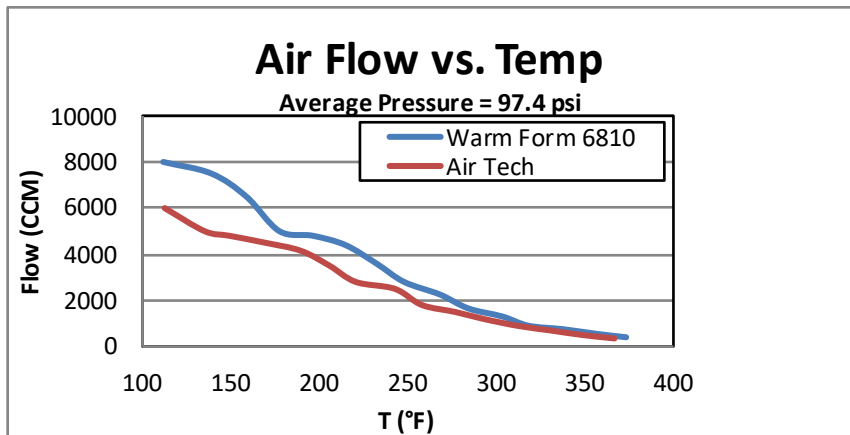

Air Flow vs. Temp

Average Pressure = 97.4 psi

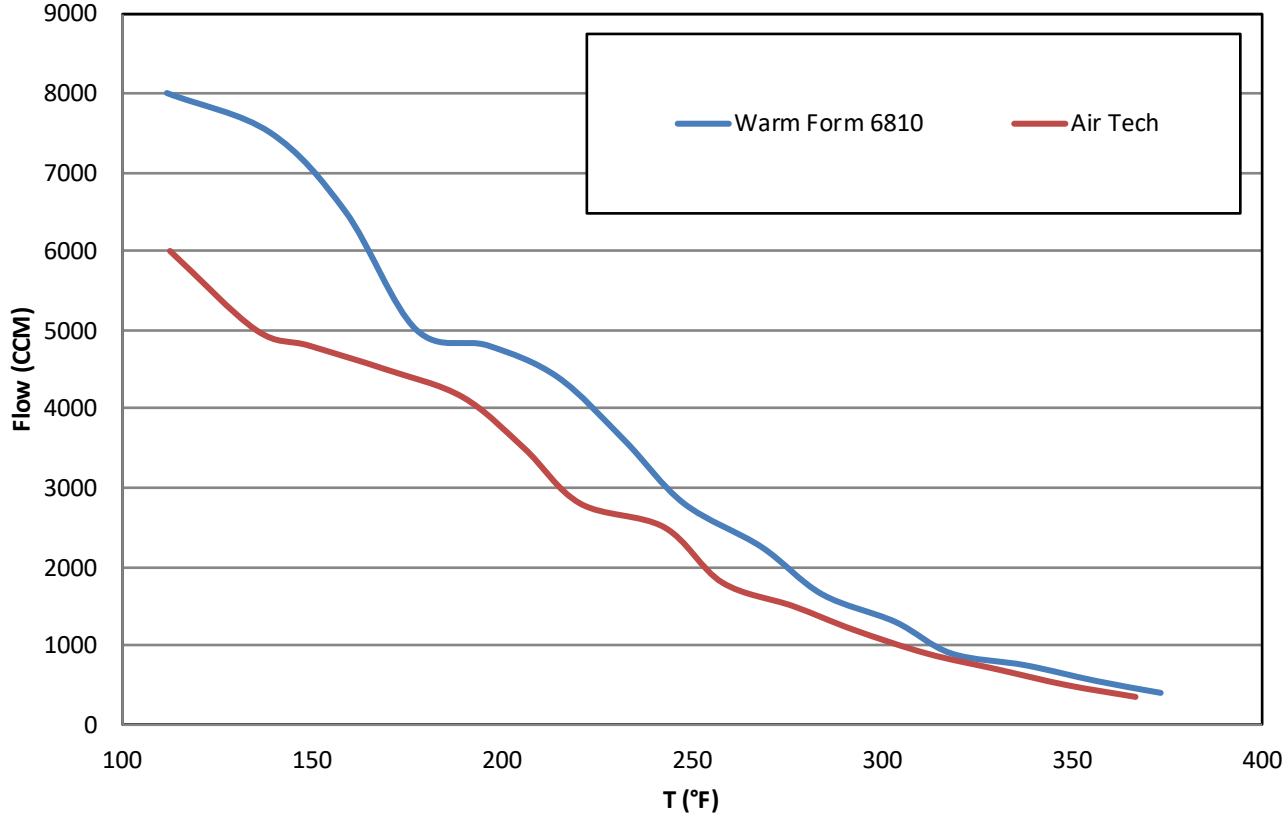

Flow vs. Temp

Average Pressure = 97.37

